

## 29Ja



## ESD pryžová kola

Valivý odpor	Rolling Resistance
Otočný odpor	Swivel Resistance
Tlumení	Shock Absorbing
Hlučnost	Noise



## ESD Rubber Wheels

Otěruvzdornost	Abrasion Resistance
Odolnost proti trhání	Tearing Resistance
Šetrnost k povrchu	Floor Friendliness
Tvarová stálost	Shape Stability



### ESD pryžová kola typu 29Ja

Materiál disku	polypropylen
Uložení	jedno kuličkové ložisko
Krytka	polypropylen
Materiál běhounu	termoplastická pryž
Tvrdost běhounu	95 ShA
Bezestopý běhoun	Ano
Typ ovládání	ruční
Max. rychlost	3 km/h
Pasivní teplotní odolnost	od -20°C do 60°C
El. odpor	1000 Ohm

### ESD Rubber Wheels Type 29Ja

Wheel centre material	polypropylene
Bearing	single ball bearing
Threadguard	polypropylene
Tread material	thermoplastic rubber
Tread hardness	95 ShA
Non marking tread	Yes
Control type	manual
Max. speed	3 km/h
Passive temp. resistance	from -20°C to 60°C
El. Resistance	1000 Ohm

ESD



	mm	mm	mm	mm	kg
29K050a-22-06	50	18	22	6	40
29K075a-28-06	75	25	28	6	60
29K100a-30-08	100	25	30	8	70
29K080a-35-08	80	32	35	8	70
29K100a-36-08	100	32	36	8	80
29K125a-36-08	125	32	36	8	100
29K150a-36-08	150	32	36	8	100


## ESD přístrojové kladky

materiál pouzdra: zinkovaná ocel  
 materiál běhounu: termoplastická pryž 95 ShA  
 bezstopý běhoun: ano  
 materiál disku: polypropylen, uložení: jedno kuličkové ložisko  
 ESD provedení: ano

## ESD Apparatus Castors

housing material: zinc plated steel steel  
 tread material: thermoplastic rubber 95 ShA  
 non-marking tread: yes  
 wheel centre material: polypropylene, bearing: single ball bearing  
 ESD version: yes

ESD

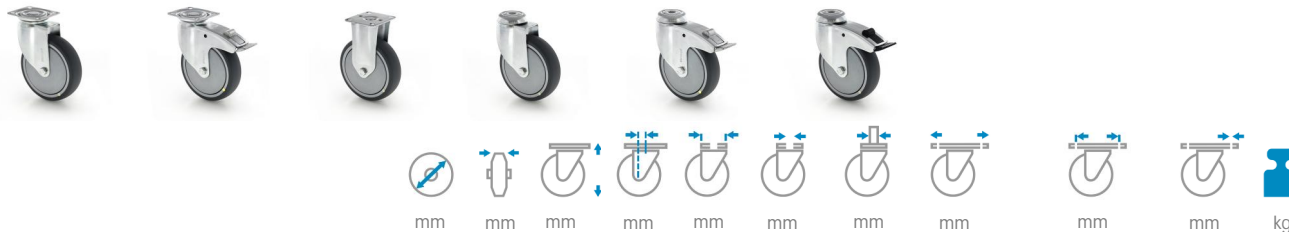

### otočná | swivel

377a39K080aZPD	80	32	113	32	77x67	61,5x51,5/56x46	8,3	70
377a39K100aZPD	100	32	135	38	77x67	61,5x51,5/56x46	8,3	80
377a39K125aZPD	125	32	160	41	77x67	61,5x51,5/56x46	8,3	100
377a39K150aZPD	150	32	185	45	77x67	61,5x51,5/56x46	8,3	100

### otočná s úplnou blokací | swivel with total lock

377h39K080aZPD	80	32	113	38	77x67	61,5x51,5/56x46	8,3	70
377h39K100aZPD	100	32	135	44	77x67	61,5x51,5/56x46	8,3	80
377h39K125aZPD	125	32	160	41	77x67	61,5x51,5/56x46	8,3	100
377h39K150aZPD	150	32	185	36	77x67	61,5x51,5/56x46	8,3	100

### pevná | fixed

374a39K100aZPD	100	32	135	77x67	61,5x51,5/56x46	8,3	80
374a39K125aZPD	125	32	160	77x67	61,5x51,5/56x46	8,3	100
374a39K150aZPD	150	32	185	77x67	61,5x51,5/56x46	8,3	100

### otočná | swivel

377a39K080aZLD	80	32	113	32	61	12,5	70
377a39K100aZLD	100	32	135	38	61	12,5	80
377a39K125aZLD	125	32	160	41	61	12,5	100
377a39K150aZLD	150	32	185	45	61	12,5	100

### otočná s úplnou blokací | swivel with total lock

377h39K080aZLD	80	32	113	38	61	12,5	70
377h39K100aZLD	100	32	135	44	61	12,5	80
377h39K125aZLD	125	32	160	41	61	12,5	100
377h39K150aZLD	150	32	185	36	61	12,5	100

### otočná se směrovou blokací | swivel with directional lock

377r39K100aZLD	100	32	135	44	61	12,5	80
377r39K125aZLD	125	32	160	41	61	12,5	100
377r39K150aZLD	150	32	185	36	61	12,5	100